


TECHNICAL DATA SHEET

OZ-PN-MICRO-V-4x4x1mm



PRODUCT DEFINITION:

Acoustic panel with holes on wieved face and at back side. Soundtex black glass tissue applied to back face. Various color options available on all visible surfaces. Used for interior applicants in general building and civil engineering structures.

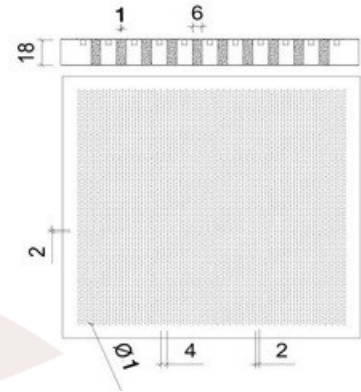

FREQUENCY (HZ)		100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
SOUND ABSORPTION COEFFICIENT	Without Mineral Wool	0,35	0,51	0,60	0,64	0,77	0,81	0,84	0,84	0,82	0,73	0,69	0,71	0,72	0,72	0,75	0,77	0,80	0,83
	With Mineral Wool	0,54	0,62	0,62	0,67	0,74	0,78	0,82	0,83	0,82	0,79	0,82	0,78	0,76	0,77	0,77	0,78	0,77	0,84


ACOUSTIC FEATURES:

Diameter Of Hole (mm)	1
Pitch Of Hole (mm) Depth	4x2
Of Hole (mm) Perforated	18
Area (%)	10

ACOUSTIC VALUES

Mounting Depth 200mm	NRC
Without Mineral Wool	0,75
With Mineral Wool	0,80
Mineral Wool	50 mm

Absorption according to EN ISO 354

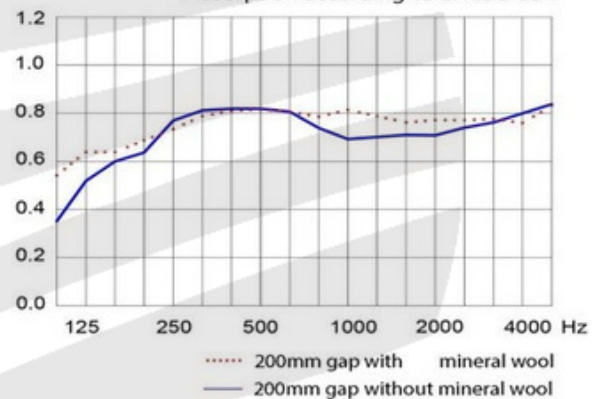

GENERAL FEATURES:

Materials	MDF Standart D-s2.d0 MDF Fire Resistant B-s2.d0
Thickness (mm)	18mm (MDF) For other materials and thicknesses, please contact with OAK ZONE
Approximate Weight	13,45 kg/m2 18mm Standart MDF 14,60 kg/m2 18mm Fire Resistant MDF
Finishing	Wood Veneered Lacquered to RAL Chart High Pressure Laminate (HPL)

Sizes

