



OZ-PN-Z-32x32x5/12mm

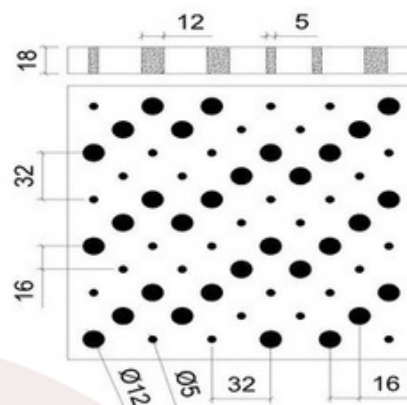

Acoustic panel with holes on wieved face and at back side. Soundtex black glass tissue applied to back face. Various color options available on all visible surfaces. Used for interior applicants in general building and civil engineering structures.

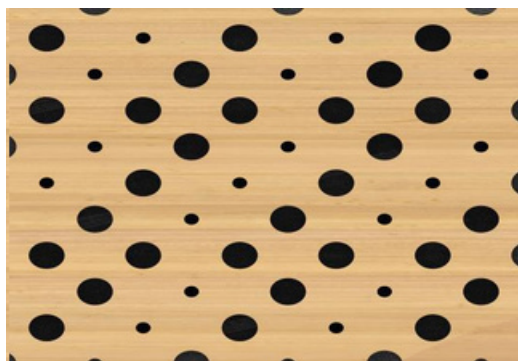

FREQUENCY(HZ)		100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
SOUND ABSORPTION COEFFICIENT	Without Mineral Wool	0,36	0,47	0,59	0,62	0,75	0,80	0,83	0,80	0,72	0,61	0,54	0,55	0,53	0,52	0,51	0,52	0,55	0,60
	With Mineral Wool	0,48	0,64	0,62	0,68	0,75	0,80	0,80	0,79	0,76	0,69	0,73	0,65	0,59	0,56	0,57	0,58	0,57	0,66

FEATURES): Distance Between Holes(mm


Diameter Of Hole (mm)	16
Pitch Of Hole (mm)	5/12
Depth Of Hole (mm)	32x16
Perforated Area (%)	18
	13

ACoustic VALUES NRC

Mounting Depth 200mm

With MineralWool	0,70
Without Mineral Wool	0,65

Mineral Wool 50 mm

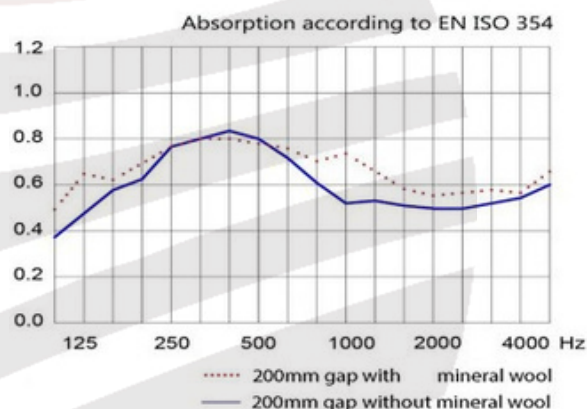

GENERAL FEATURES:

Materials

MDF Standart D-s2.d0
MDF Fire Resistant B-s2.d0

Thickness (mm)

18mm (MDF)
For other materials and thicknesses, please contact with OAK ZONE

Approximate Weight

13,45 kg/m² 18mm Standart MDF 14,60 kg/m² 18mm Fire Resistant MDF

Finishing

Melamine Varnished Wood Veneered High Pressure Laminate (HPL)
Lacquered to RAL Chart

Sizes

