


TECHNICAL DATA SHEET


OZ-PN-NANO-1.9x1.9x0.5mm

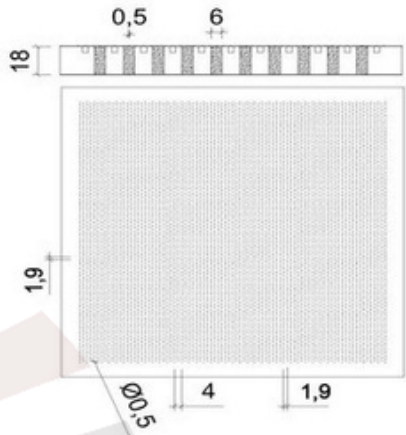

FREQUENCY(HZ)		100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
SOUND ABSORPTION COEFFICIENT	200 mm	0,14	0,24	0,32	0,63	0,73	0,85	0,91	0,93	0,93	0,88	0,82	0,73	0,73	0,69	0,64	0,66	0,66	0,65

ACOUSTIC FEATURES: Diameter Of Hole (mm) 0,5
Distance Between Holes (mm) 1.9x1.9
Depth Of Hole (mm) 18
Perforated Area (%) 6

ACOUSTIC VALUES:
Mounting Depth 200mm **NRC**
With Mineral Wool 0,75
Mineral Wool 50 mm

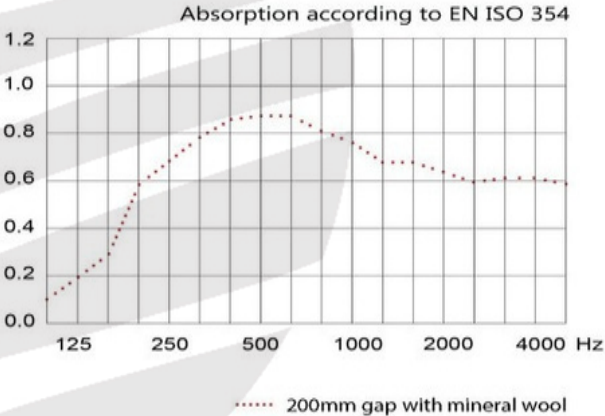

GENERAL FEATURES:
Materials MDF Standart D-s2.d0
MDF Fire Resistant B-s2.d0
Thickness (mm) 18mm (MDF)
For other materials and thicknesses, please contact with OAK ZONE
Approximate Weight 13,45 kg/m2 18mm Standart MDF 14,60 kg/m2 18mm Fire Resistant MDF
Finishing Wood Veneered
Lacquered to RAL Chart High Pressure Laminate (HPL)

Sizes	2400×1200	2400×600	1200×600	600 × 600
-------	-----------	----------	----------	-----------