
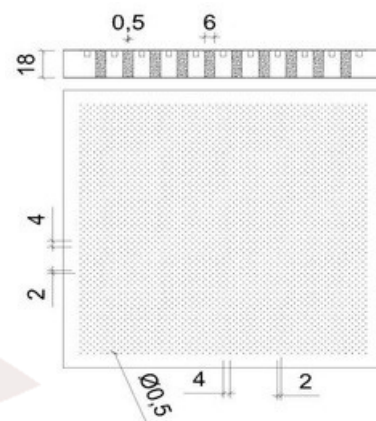


TECHNICAL DATA SHEET

OZ-PN-NANO-4x4x0.5mm

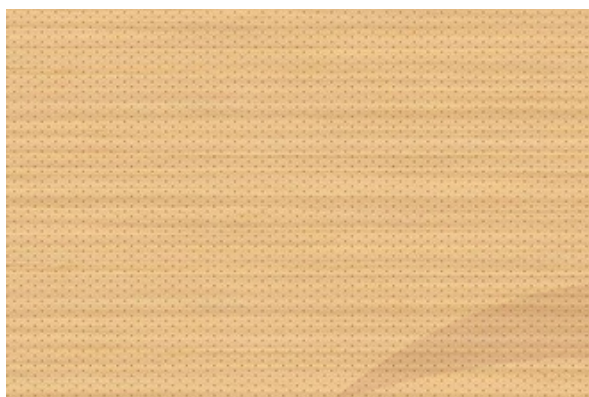

FREQUENCY (HZ)		100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
SOUND ABSORPTION COEFFICIENT	200mm Mineral Wool	0,31	0,40	0,39	0,32	0,27	0,25	0,23	0,23	0,21	0,20	0,20	0,18	0,15	0,13	0,10	0,08	0,04	0,06

ACOUSTIC FEATURES:


Diameter Of Hole (mm)	0,5
Pitch Of Hole (mm) Depth	4x4
Of Hole (mm) Perforated	18
Area (%)	3

ACOUSTIC VALUES

Mounting Depth 200mm NRC 0,20
With Mineral Wool

Mineral Wool 30 mm

Absorption according to EN ISO 354

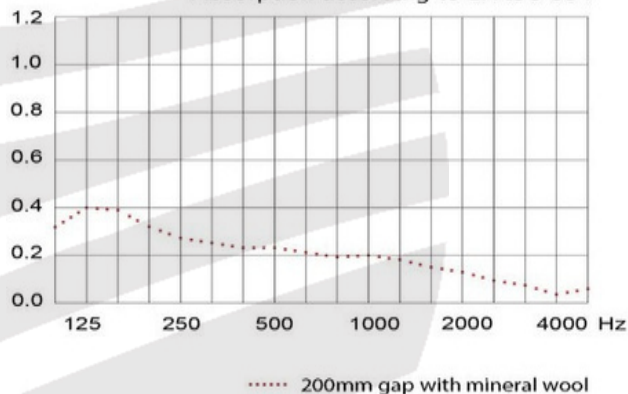

GENERAL FEATURES:

Materials	MDF Standart D-s2.d0 MDF Fire Resistant B-s2.d0
Thickness (mm)	18mm (MDF) For other materials and thicknesses, please contact with OAK ZONE
Approximate Weight	13,45 kg/m2 18mm Standart MDF 14,60 kg/m2 18mm Fire Resistant MDF
Finishing	Wood Veneered Lacquered to RAL Chart High Pressure Laminate (HPL)

Sizes

